

appliances for drinking water at its best

OASIS DP

Reverse Osmosis

 ASSOCIAZIONE AQUA ITALIA

MEMBER



COMPANY
WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
=ISO 9001:2000=

AQUAVIVA
more to drink

OASIS DP DUO

OASIS DP performs **Patented and Registered Model Housings.**

Thanks to the single head design, OASIS DP Duo and Trio have no need for connections nor fittings in between the housings, no work for connections and no risk of leaking. The housing head is stronger and more reliable than ever.

Thanks to the design, the width is dramatically reduced **saving space for the installation.**

MIN WORKING PRESSURE 2 BAR MAX WORKING PRESSURE 8 BAR



Tank 19 l



SPACE SAVING

HOUSING DUO
REGISTERED MODEL
PATENT PENDING

model	membrane type (NSF approved)	max daily production litres
OASIS DP DUO BW 36	Filmtec 36 GPD	136
OASIS DP DUO BW 75	Filmtec 75 GPD	284
OASIS DP DUO TS-BW 36	Filmtec 36 GPD	136
OASIS DP DUO TS-BW 75	Filmtec 75 GPD	284



model	membrane type (NSF approved)	max daily production litres
OASIS DP DUO BW 36 U.V.	Filmtec 36 GPD	136
OASIS DP DUO BW 75 U.V.	Filmtec 75 GPD	284
OASIS DP DUO TS-BW 36 U.V.	Filmtec 36 GPD	136
OASIS DP DUO TS-BW 75 U.V.	Filmtec 75 GPD	284



model	membrane type (NSF approved)	max daily production litres
OASIS DP DUO BW 36 PUMP	Filmtec 36 GPD	136
OASIS DP DUO BW 75 PUMP	Filmtec 75 GPD	284
OASIS DP DUO TS-BW 36 PUMP	Filmtec 36 GPD	136
OASIS DP DUO TS-BW 75 PUMP	Filmtec 75 GPD	284



model	membrane type (NSF approved)	max daily production litres
OASIS DP DUO BW 36 U.V. PUMP	Filmtec 36 GPD	136
OASIS DP DUO BW 75 U.V. PUMP	Filmtec 75 GPD	284
OASIS DP DUO TS-BW 36 U.V. PUMP	Filmtec 36 GPD	136
OASIS DP DUO TS-BW 75 U.V. PUMP	Filmtec 75 GPD	284



refill cartridges for Oasis DP

FA 5 micron
SEDIMENT. Wound polypropylene filter. Filtration of sand, scales, lime, rust, fine particles. Life-span: 3-6 months.

LA
CARBON G.A.C. Container with Granular Activated Carbon. Reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc). Life-span: 3 months.

CB 5 micron
CARBON BLOCK. Filtration of fine particles (rust, lime, sand scales); reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc). Life-span: 6 months.

PP/CPP 5 micron
SEDIMENT. Melt-blown polypropylene grooved/smooth filter: high efficiency filtration of fine particles, rust, lime, sand, scales. Life-span: 3-6 months.

OASIS DP under sink reverse osmosis units have been designed for the production of good and pure water directly at the point of use. Reverse osmosis is the ultimate process to get rid of all impurities, bad odours and tastes, dangerous chemicals.

OASIS DP are supplied with a special tap, to be fitted to the sink top, dedicated to the delivery of pure water only, to be used for drinking, cooking and preparing of foods and drinks.

MAX WORKING TEMPERATURE 45°C MAX TDS 1500 PPM

OASIS DP TRIO



HOUSING TRIO
REGISTERED MODEL
PATENT PENDING

SPACE SAVING

Tank 19 l




model	membrane type (NSF approved)	max daily production litres
OASIS DP TRIO BW 36	Filmtec 36 GPD	136
OASIS DP TRIO BW 75	Filmtec 75 GPD	284
OASIS DP TRIO TS-BW 36	Filmtec 36 GPD	136
OASIS DP TRIO TS-BW 75	Filmtec 75 GPD	284

model	membrane type (NSF approved)	max daily production litres
OASIS DP TRIO BW 36 U.V.	Filmtec 36 GPD	136
OASIS DP TRIO BW 75 U.V.	Filmtec 75 GPD	284
OASIS DP TRIO TS-BW 36 U.V.	Filmtec 36 GPD	136
OASIS DP TRIO TS-BW 75 U.V.	Filmtec 75 GPD	284



model	membrane type (NSF approved)	max daily production litres
OASIS DP TRIO BW 36 PUMP	Filmtec 36 GPD	136
OASIS DP TRIO BW 75 PUMP	Filmtec 75 GPD	284
OASIS DP TRIO TS-BW 36 PUMP	Filmtec 36 GPD	136
OASIS DP TRIO TS-BW 75 PUMP	Filmtec 75 GPD	284

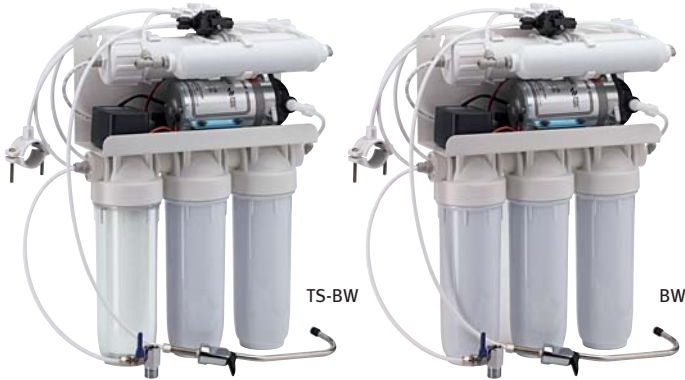

model	membrane type (NSF approved)	max daily production litres
OASIS DP TRIO BW 36 U.V. PUMP	Filmtec 36 GPD	136
OASIS DP TRIO BW 75 U.V. PUMP	Filmtec 75 GPD	284
OASIS DP TRIO TS-BW 36 U.V. PUMP	Filmtec 36 GPD	136
OASIS DP TRIO TS-BW 75 U.V. PUMP	Filmtec 75 GPD	284



cartridge variants

Cartridges available on demand

GAC-Ag Granular Activated Carbon Silver treated.

QA-AF Anti-nitrate ionic exchange resin.

KDF Heavy-metals and chlorine reduction medium.

OT Arsenic reduction medium.

CA-SE HF-U Carbon block with "hollow-fibre" ultra-filtration element at 0,02 micron.

Cartridges with double O-ring quick-fit system **BX**.

BRAVO DP housings fit to **BX** and standard **SX** (DOE) cartridges.



included in the package



-X- Spanner



spare o-rings

AVAILABLE ACCESSORIES



DEDICATED TAP LUX brass chromium plated tap with ceramic mixer, high finish – Lux design. NSF approved.



OASIS DP UV PL series provided with plastic sterilizer UV PL 120, with inner stainless steel chamber. A/C 110/220 V – 50 Hz. Electrical absorption 4 W. UV-C dose > 15.000µW/cm². Flow rate 2 l/m. Quick-fit in/out connection 1/4". Average lamp life-time 7.000 h. CE, ROHS approved.



NO RUST!
PLASTIC WALL BRACKETS only for models without booster pump.



PLASTIC -DUO- WALL BRACKET



PLASTIC -TRIO- WALL BRACKET



-DP- Base

SPARE PARTS FOR OASIS DP



POLYETHYLENE HOSE 1/4"



AUTOMATIC SHUT-OFF VALVE



VESSEL HOUSING FOR OSMOTIC MEMBRANE
ATLAS FILTRI EXCLUSIVE DESIGN
WHITH DOUBLE O-RING SEALING



OSMOTIC MEMBRANE 36/75 GPD



TANK VALVE JUNCTION



STORAGE TANK 19 l



NON-RETURN VALVE



IN-LINE CARBON POST-FILTER 2x10"
ATLAS FILTRI EXCLUSIVE DESIGN



DEDICATED TAP



DOUBLE CLIP 50x60 mm



SINGLE CLIP 60 mm



METAL WALLBRACKET DUO COMPLETE WITH SCREWS



METAL WALLBRACKET DUO PUMP COMPLETE WITH SCREWS



METAL WALL BRACKET TRIO COMPLETE WITH SCREWS



METAL WALLBRACKET TRIO PUMP COMPLETE WITH SCREWS



MALE STRAIGHT JUNCTION 1/4" x 1/8"



MALE STRAIGHT JUNCTION 1/4" x 1/4"



T JUNCTION 1/4"



MALE ELBOW JUNCTION 1/4" x 1/4"



ELBOW JUNCTION 1/4"



STEM ADAPTOR 1/4" x 1/4"



ENTRY WATER TAP (CATCHMENT)



DISCHARGE CLAMP



MALE ELBOW JUNCTION 1/4" x 1/8" WITH FLOW RESTRICTOR



MALE ELBOW JUNCTION 1/4" x 1/8" WITH CHECK VALVE



U.V. LAMP 4 W



BOOSTER PUMP 90 PSI



MAX PRESSURE SWITCH FOR BOOSTER PUMP

R02-05/08. Subject to change without notice



ATLAS FILTRI® is a registered trade mark of ATLAS FILTRI srl. Unauthorized use of the registered trade mark is strictly forbidden and legally persecuted. Images and texts are property of ATLAS FILTRI srl, which reserves the rights to change products design and specification without prior notice.

ATLAS FILTRI srl - Via del Santo 227, I-35010 Limena, Italy. Tel +39.049.76.90.55 Fax +39.049.76.99.94 - www.atlasfiltri.com