



.....  
▶▶▶▶▶▶▶▶▶▶ more to drink

IN-LINE FILTER have been designed for the production of good and pure water directly at the point of use. A slim, space saving, design complete with the easiest installation kit makes free from stocking bottles and preserve the environment from plastic wastes.

*Undersink filters for drinking water at its best.*

# IN-LINE FILTER




# IN-LINE FILTER



**IN-LINE FILTER** are supplied with a special tap, to be fitted to the sink counter, dedicated to the delivery of pure water only, to be used for drinking, cooking and for the preparation of foods and drinks.

The filters are made of completely non-toxic materials and are suitable to the use with drinking water, in compliance with the most stringent EU directives.

Model	Cartridges assortment	flow l/m
IN-LINE FILTER BW CPP	CPP	10
IN-LINE FILTER BW LA	LA	6
IN-LINE FILTER BW CA-SE 5 mcr	CA-SE 5 mcr	6
IN-LINE FILTER BW CA-SE HF 0,15 mcr	CA-SE HF 0,15 mcr	6

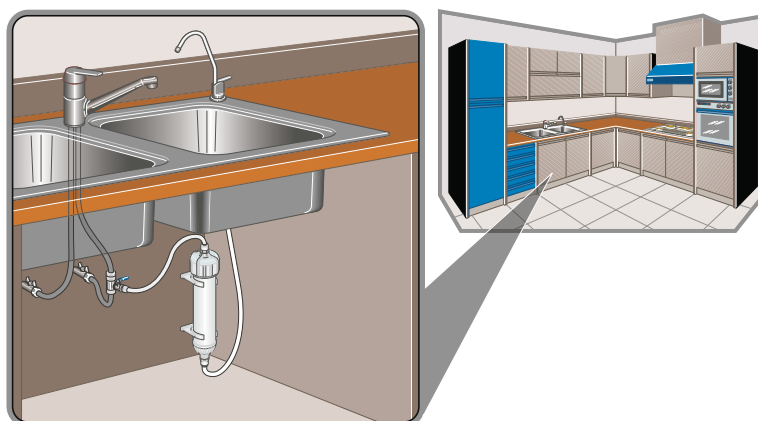

Flow rate in litres per minute (l/m) is the average water flow from the dedicated tap (filtered water) using a new cartridge. The flow rate may vary in function of water quality and time in service (life-span) of the cartridges. Life-span is the average working life of the cartridge. It depends on the water quality, which is an extremely variable factor: life-span is indicated for a mains water supply with average european characteristics. IN-LINE FILTER are not potable water-makers: control the water quality before installation.

cartridges assortment



CPP In-line 5 micron

SEDIMENT. Melt-blown polypropylene filter: high efficiency filtration of fine particles, rust, lime, sand, scales.  
Life-span: 3-6 months.



LA In-line

CARBON G.A.C. Container with Granular Activated Carbon; reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc).  
Life-span: 3 months.



PATENTED



CA-SE In-line 5 micron

CARBON BLOCK. Filtration of fine particles (rust, lime, sand, scales); reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc).  
Life-span: 3-6 months.



CA-SE HF In-line 0,15 micron

CARBON BLOCK. Micro-filtration with "hollow-fibre" capillary membranes (STER-O-TAP®) of very fine particles and some micro-organisms; reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc).  
Life-span: 6 months.  
Maintenance: surface scraping every 2-3 months.



cartridge variants available on demand



CA-SE Pb In-line 0,5 micron

CARBON BLOCK. Filtration of fine particles (rust, lime, sand, scales); reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc.); reduction of heavy metals (Lead, Mercury, Chromium, etc.).  
Life-span: 6 months.  
Maintenance: surface scraping every 2-3 months.



CA-SE HF-U In-line 0,02 micron

CARBON BLOCK. Ultra-filtration with "hollow-fibre" capillary membranes (STER-O-TAP®) of very fine particles and micro-organisms; reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc.).  
Life-span: 6 months.  
Maintenance: surface scraping every 2-3 months.



QA-AF In-line

Container with strong anionic resin; reduction of Nitrates below the concentration recommended by WHO (10 mg/l) within the working limits.  
Life-span: variable.



PATENTED



QA-KDF In-line

Container with metallic alloy with RedOx activity; reduction of chlorine (bad tastes, odours) and heavy-metals (Lead, Mercury, Chromium, etc.) with Bacteria-static effects.  
Life-span 6-9 months.



PATENTED

KDF® registered trade mark of KDF Fluid Treatment, Inc., U.S.A.



Fine sediments, rust, lime



Chlorine, bad taste and odour



Pesticides, insecticides, solvents, organic compounds



Micro-organisms: Protozoans (Giardia, Cryptosporidium)



Micro-organisms: Bacteria (Micro-Filtration)



Micro-organisms: Bacteria, Viruses (Ultra-Filtration)



Heavy Metals (Lead, Mercury, Chromium, etc.)




Nitrates

## accessories included



-IL- SPANNER



O-RINGS



CLIPS 60 mm  
WITH SCREWS



KIT IN-LINE FILTER

## SPARE PARTS FOR IN LINE FILTER - CONNECTION KIT



MALE JUNCTION 1/4" x 1/4"



DEDICATED TAP



POLYETHYLENE HOSE 1/4"

BY-PASS VALVE  
FOR HOSE 1/4"

## accessories available



**UV 600**  
Stainless steel UV sterilizer.  
A/C 220/240 V – 50/60 Hz. Electrical absorption  
16 W. UV-C dose > 30.000µW/cm<sub>2</sub>. Flow rate  
10 l/m. In/out connection 1/8" male threads.  
Average lamp life-time 9.000 h. CE approved.



**UV PL 240**  
Plastic UV sterilizer, with inner stainless steel chamber. A/C  
110/220 V – 50 Hz. Electrical absorption 6 W. UV-C dose >  
30.000µW/cm<sub>2</sub>. Flow rate 4 l/m. Quick-fit in/out connection  
1/4", no need for further fittings. Average lamp life-time 7.000  
h. CE, ROHS approved.



**WATERMETER**  
Water meter with  
adjustable  
automatic  
flow-stopper.



**DEDICATED TAP LUX**  
Brass chromium-plated  
dedicated tap with ceramic  
mixer, high finish – Lux design.  
NSF approved.

## housing variants available on minimum quantity

