


# BT PP SX container for water treatment material + "melt blown" polypropylene filtering medium from 1 to 25 micron throw away cartridge

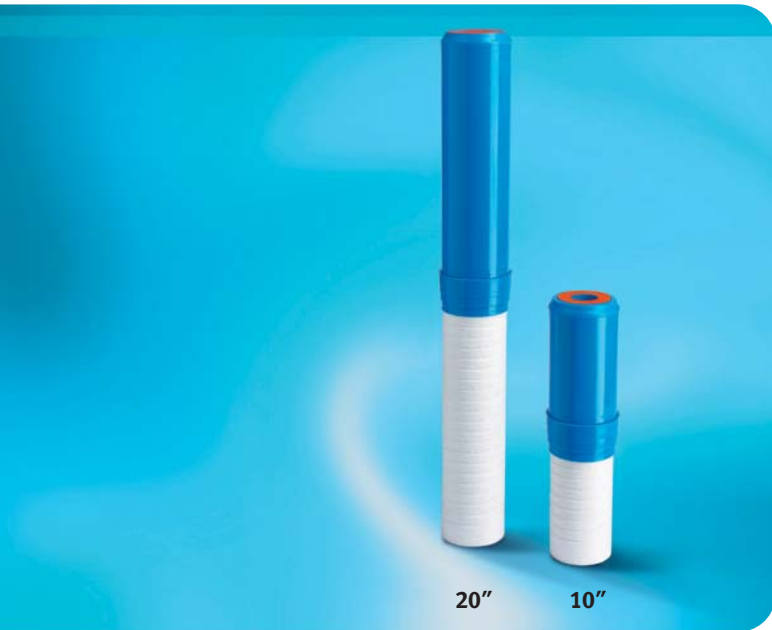

## APPLICATIONS

Combination of high efficiency filtration of fine particles, rust, lime, sand, scales and water treatment materials.

## WORKING CONDITIONS

Max working temperature \_\_\_\_\_ 45°C

## SPECIFICATIONS

Non-toxic materials, suitable for drinking water.

**Filtering medium:** polypropylene.

**Container:** polypropylene.

**End cap and grid:** polypropylene.

**Flat seal:** PVC.

R04-11/10. Subject to change without notice

suitable housing	cartridge model	cartridge height	mm		
			A	B	C
Senior	BT PP 10 SX-AB - 1 mcr	10"	252	72	28
Senior	BT PP 10 SX-AB - 5 mcr	10"	252	72	28
Senior	BT PP 10 SX-AB - 10 mcr	10"	252	72	28
Senior	BT PP 10 SX-AB - 25 mcr	10"	252	72	28
Master	BT PP 20 SX-AB - 1 mcr	20"	510	72	28
Master	BT PP 20 SX-AB - 5 mcr	20"	510	72	28
Master	BT PP 20 SX-AB - 10 mcr	20"	510	72	28
Master	BT PP 20 SX-AB - 25 mcr	20"	510	72	28

### Available filled cartridges

Cartridges **BT PP LA** with granular activated carbon for chlorine and chloride pollutants reduction in domestic and industrial installations. See catalogues SX pag 24, BX pag 11, AX pag 11 for complete technical information.

Cartridges **BT PP HA** with polyphosphate crystals for anti-scale and anti-corrosion protection of domestic and industrial installations. See catalogues SX pag 25, BX pag 12, AX pag 12 for complete technical information.

Cartridges **BT PP QA-AF** with strong anionic resin for nitrates reduction in small domestic and industrial appliances. See catalogues SX pag 26, BX pag 13, AX pag 13 for complete technical information.

Cartridges **BT PP QA-CF** with strong cationic resin for elimination of total hardness, production of soft water in small domestic and industrial appliances. See catalogues SX pag 27, BX pag 12, AX pag 12 for complete technical information.

Cartridges **BT PP QA-LM** with mixed bed resin for demineralisation of water in small domestic and industrial appliances. See catalogues SX pag 28, BX pag 13, AX pag 13 for complete technical information.

### VARIANTS available on minimum quantity

**TS** Cartridges with transparent container.

**AG** Cartridges with granular activated carbon silver treated for bacteriostatic action.

**KDF** Cartridges with KDF® for reduction of heavy-metals.

**S** Cartridges with siliphosphate spheres.


### accessories



Containing sponge Polyurethane foam. Currently provided with models BT PP LA and BT PP QA.



Cartridges with double O-ring quick-fit system **BX** (collar diameter 45 mm) and **AX** (collar diameter 39.70 mm).

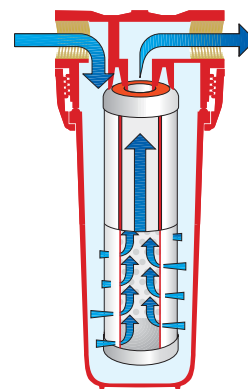

# BT RL SX polyester filtering net – 50 micron + water treatment material throw away cartridge



## APPLICATIONS

Combination of filtering net for filtration of fine particles, rust, lime, sand, scales and water treatment materials.

## WORKING CONDITIONS

Max working temperature \_\_\_\_\_ 45°C

## SPECIFICATIONS

Non-toxic materials, suitable for drinking water.

**Filtering medium:** polyester net.

**Armouring:** polypropylene.

**End caps and grids:** polypropylene.

**Flat seals:** PVC.



suitable housing	cartridge model	cartridge height	mm		
			A	B	C
Medium	BT RL 5 SX 50 mcr	5"	125	70	30
Junior	BT RL 7 SX 50 mcr	7"	173	70	30
Senior	BT RL 10 SX 50 mcr	10"	250	70	30
Master	BT RL 20 SX 50 mcr	20"	505	70	30

## Available filled cartridges

Cartridges **BT RL LA** with granular activated carbon for chlorine and chloride pollutants reduction in domestic and industrial installations. See catalogues SX pag 24, BX pag 11, AX pag 11 for complete technical information.

Cartridges **BT RL HA** with polyphosphate crystals for anti-scale and anti-corrosion protection of domestic and industrial installations. See catalogues SX pag 25, BX pag 12, AX pag 12 for complete technical information.

Cartridges **BT RL QA-AF** with strong anionic resin for nitrates reduction in small domestic and industrial appliances. See catalogues SX pag 26, BX pag 13, AX pag 13 for complete technical information.

Cartridges **BT RL QA-CF** with strong cationic resin for elimination of total hardness, production of soft water in small domestic and industrial appliances. See catalogues SX pag 27, BX pag 12, AX pag 12 for complete technical information.

Cartridges **BT RL QA-LM** with mixed bed resin for demineralisation of water in small domestic and industrial appliances. See catalogues SX pag 28, BX pag 13, AX pag 13 for complete technical information.

## VARIANTS available on minimum quantity

**AG** Cartridges with granular activated carbon silver treated for bacteriostatic action.

**KDF** Cartridges with KDF® for reduction of heavy-metals.

**S** Cartridges with siliphosphate spheres.

## accessories



Containing sponge Polyurethane foam. Currently provided with models BT PP LA and BT PP QA.

Cartridges with double O-ring quick-fit system **BX** (collar diameter 45 mm) and **AX** (collar diameter 39.70 mm).

