


P Hot empty container for Hot Water Filters series

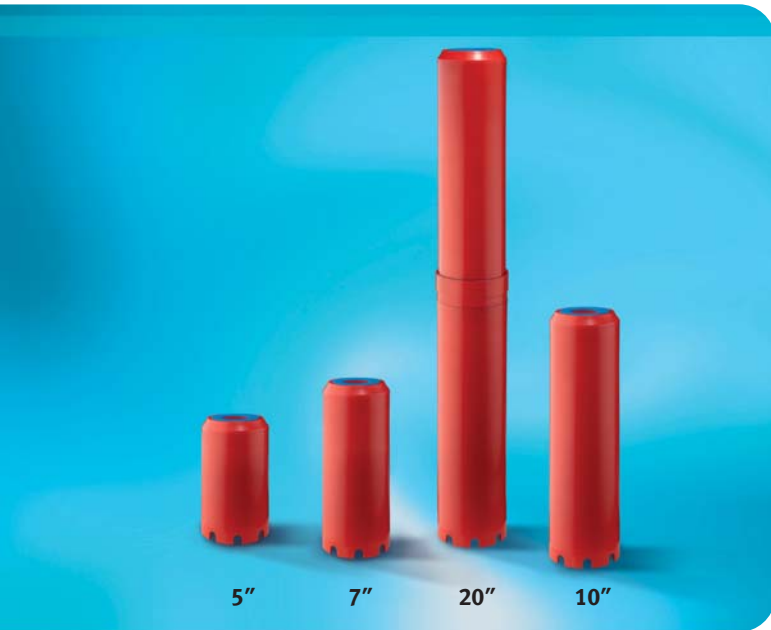

APPLICATIONS

Empty container for filling with materials (granular activated carbon, zeolite, KDF, etc) applicable for chemical-physical treatment of hot water.

WORKING CONDITIONS

Max working temperature _____ 80°C

SPECIFICATIONS

Non toxic-materials, suitable for drinking water.


Container: reinforced polyamide.

End cap and grid: reinforced polyamide.

Flat seal: PVC.

R02-11/10. Subject to change without notice

suitable housing	cartridge model	cartridge height	mm		
			A	B	C
Medium Hot	P 5 Hot SX-TS	5"	128	72	28
Junior Hot	P 7 Hot SX-TS	7"	176	72	28
Senior Hot	P 10 Hot SX-TS	10"	252	72	28
Master Hot	P 20 Hot SX-TS	20"	510	72	28

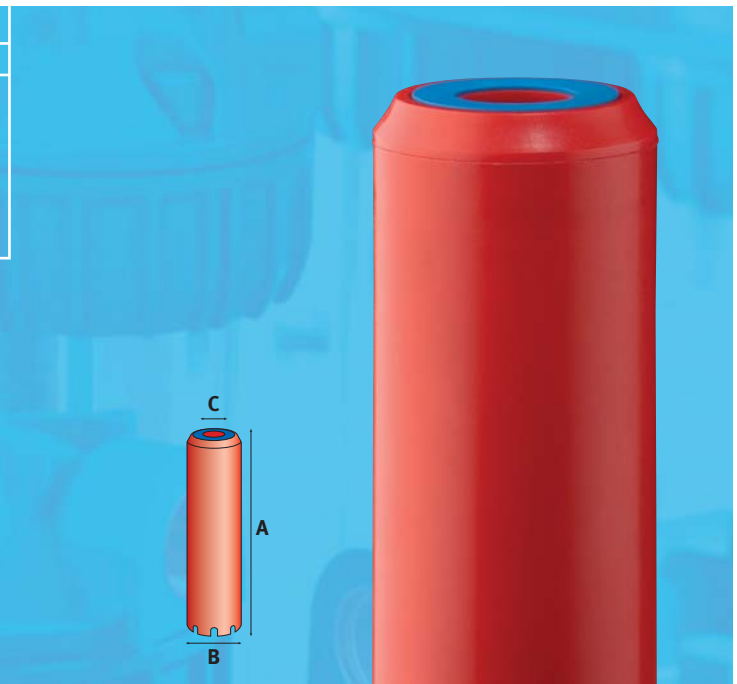

accessories



Containing sponge
Polyurethane foam

