

RL-C SX polyester filtering net - 50 micron washable cartridge - easy-clean



APPLICATIONS

RL-C is designed to make the cartridge cleaning easier; the frame is reduced to achieve a complete surface wash.

Filtration of: sand, scales, rust.

Domestic use: filtration of drinking water, protection of taps, boilers, washing machines and other installations.

Technical use: pre-filtration for water-pumps, irrigation systems, protection of industrial installations.

Average life-span: about 24 months.

Maintenance: wash every 3 months.

WORKING CONDITIONS

Max working temperature _____ 45°C

SPECIFICATIONS


Non-toxic materials, suitable for drinking water.

Filtrating medium: polyester net.

Armouring: polypropylene.

End caps: polypropylene.

Flat seals: PVC.

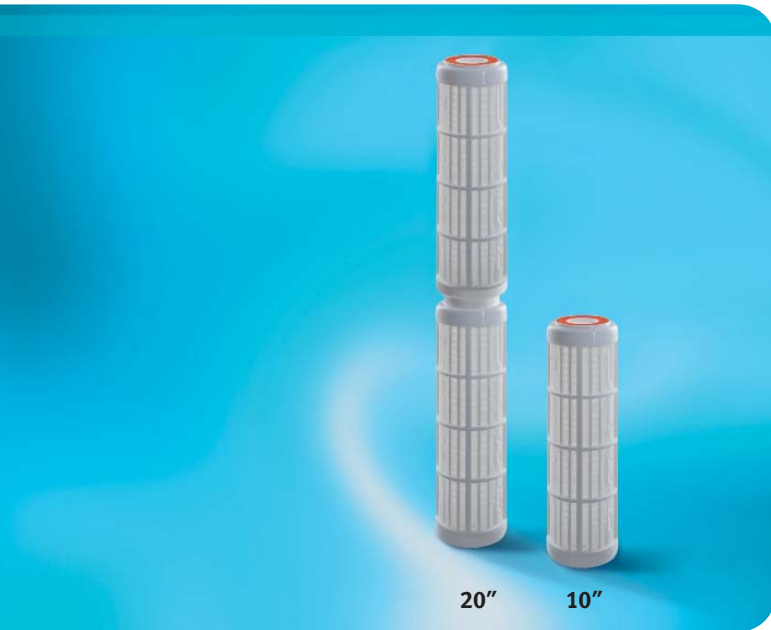

20"

10"

| suitable housing | cartridge model | cartridge height | mm | | | recommended flow rate l/h |
|------------------|-------------------|------------------|-----|----|----|---------------------------|
| | | | A | B | C | |
| Senior | RL-C 10 SX 50 mcr | 10" | 250 | 70 | 30 | 1600 |
| Master | RL-C 20 SX 50 mcr | 20" | 505 | 70 | 30 | 3000 |



VARIANTS available on minimum quantity

Cartridges with different filtration rates.

Cartridges with double O-ring quick-fit system **BX** (collar diameter 45 mm) and **AX** (collar diameter 39.70 mm).

